


# PIM400-TD2

## DSX-1022 Controller with PIM400-TD2

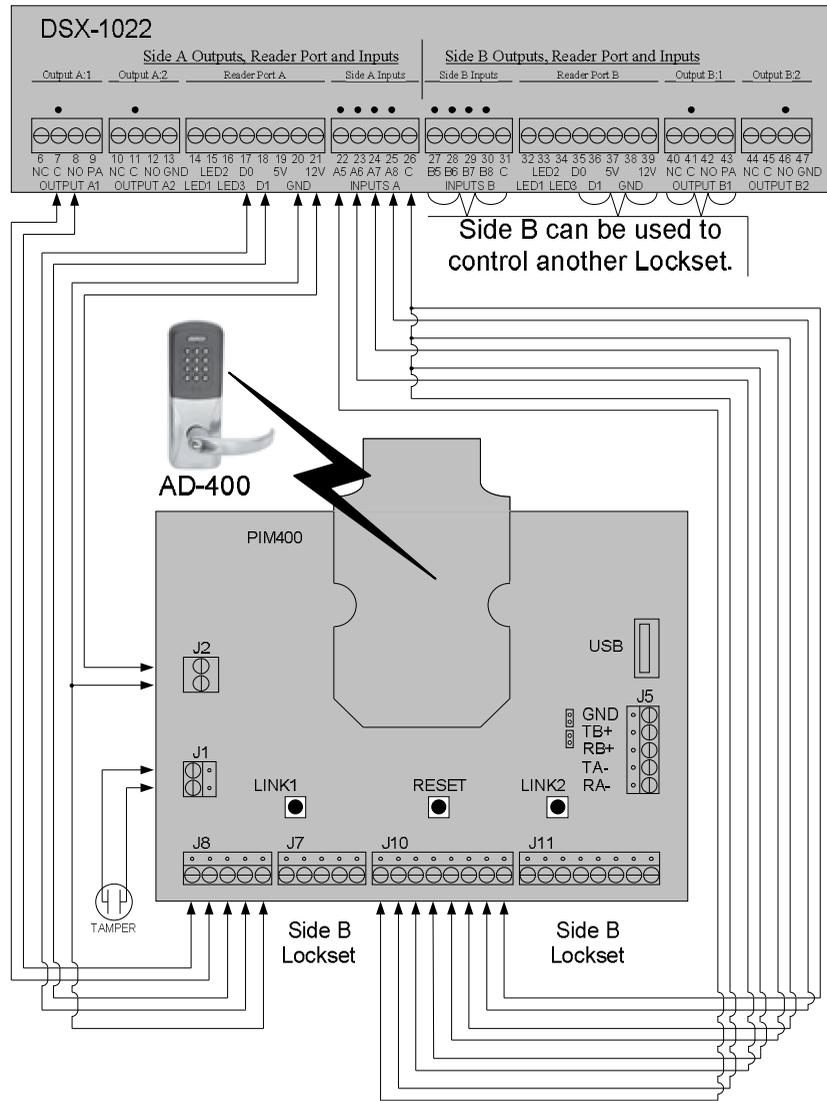

**For Lockset Online Manuals:**  
<http://w3.securitytechnologies.com/Services/TechSupport/Pages/home.aspx?ps=Electronic%20Security&pc=Electronic%20Locks&pl=AD-Series%20Locks#>

**For Instructional Videos:**  
<http://www.youtube.com/SchlageAD>

# Installing L85 Software

1. Before Installing the Software you must login as a user with full administrative rights. The PC should meet the minimum requirements as listed in the PC Requirements document on the WinDSX website, [www.dsxinc.com](http://www.dsxinc.com)
2. Inset the distribution CD and navigate to the InstallL85 folder and double click on Setup.exe. For Windows 7 and Server 2008 right click on Setup.exe and select "Run as Administrator".
3. Once the L85 software is installed open the L85 folder and double click on L85db.exe to complete the installation. For Windows 7 and Server 2008 right click on L85db.exe and select "Run as Administrator".
4. When the program appears select File and Exit.
5. From the L85 folder find the HDD32.exe program. Double click or right click and select "Run as Administrator. Install the driver for the USB Key. When the driver installation is complete insert the USB Features. Key.
6. Double click on L85DB.exe or right click and select "Run as Administrator".
7. Once the L85 database program is started you will define Comm Ports first followed by Devices.
8. Press F1 for the programming details of L85.
9. Once the programming is complete locate the L85.exe in the L85 folder and double click or right click and select "Run as Administrator".

# Updating the L85 Software

1. To update the software, insert the CD. Navigate to the Install L85 folder and double click on Setup.exe or right click and select "Run as Administrator". When prompted to Repair or Remove select Remove. When finished the L85 folder and database are still in place.
2. Run the Setup program again and install the L85 update into the same folder it was originally in. On the L85db.exe double click or right click and select "Run as Administrator".




**DSX Access Systems, Inc.**

**L85 Integrated Locksets  
 Quick Reference Card**

**DSX Access Systems, Inc.**  
 10731 Rockwall Road, Dallas, Texas 75238  
 800-346-5288 Voice 888-419-8353 Voice  
 214-553-6147 FAX [www.dsxinc.com](http://www.dsxinc.com)


**L85 to PIM400-485 Wireless Locksets**

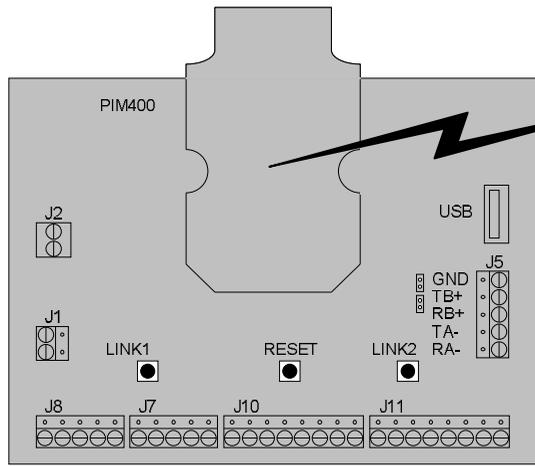

**AD-400**

J19, J20 JUMPERS REMOVED



- ← TB+
- ← RB+
- ← TA-
- ← RA-



**AD-300**

- ← V+, 12 or 24VDC 250mA
- ← V-, 12 or 24VDC 250mA
- ← TB+
- ← RB+
- ← TA-
- ← RA-


JUMPERS REMOVED

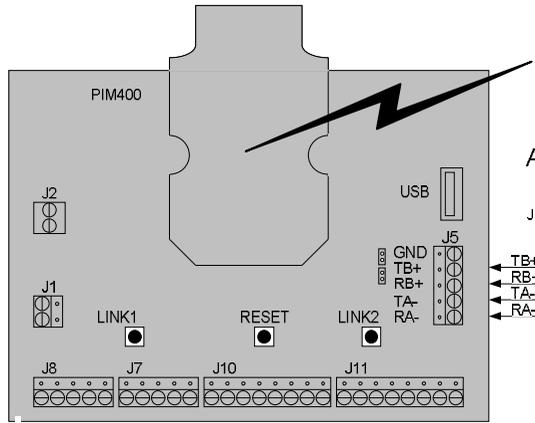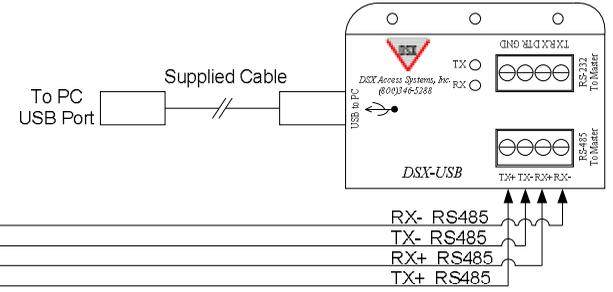

**AD-400**

J19, J20 JUMPERS REMOVED



- ← TB+
- ← RB+
- ← TA-
- ← RA-

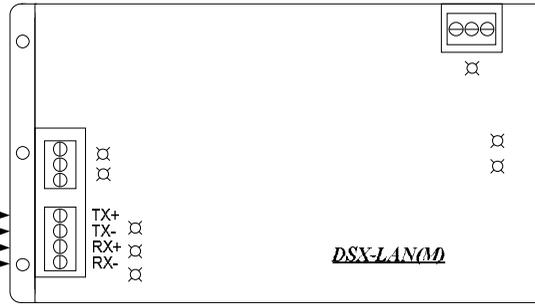

**AD-300**

- ← V+, 12 or 24VDC 250mA
- ← V-, 12 or 24VDC 250mA
- ← TB+
- ← RB+
- ← TA-
- ← RA-


JUMPERS REMOVED

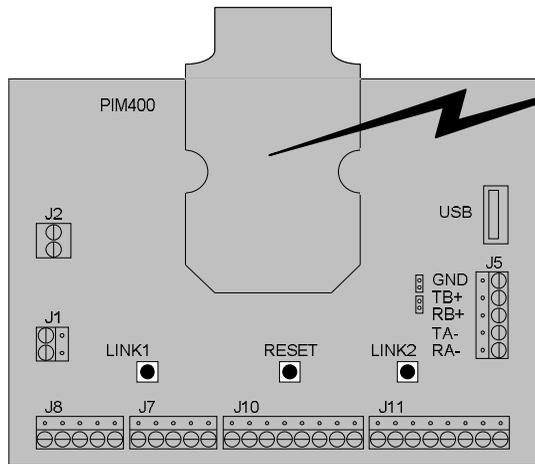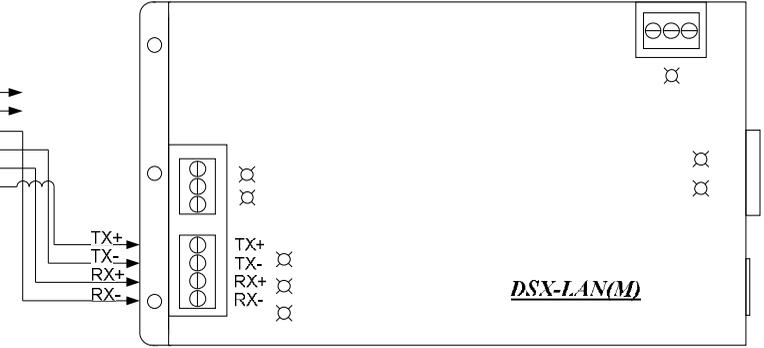

**AD-400**

J19, J20 JUMPERS REMOVED

- ← TB+
- ← RB+
- ← TA-
- ← RA-

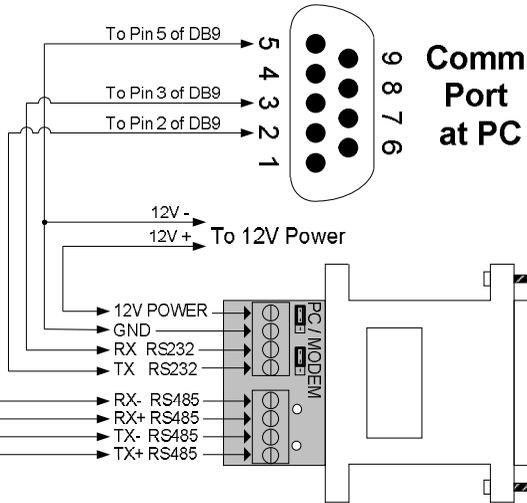


**Comm Port at PC**

**AD-300**

- ← V+, 12 or 24VDC 250mA
- ← V-, 12 or 24VDC 250mA
- ← TB+
- ← RB+
- ← TA-
- ← RA-

JUMPERS REMOVED

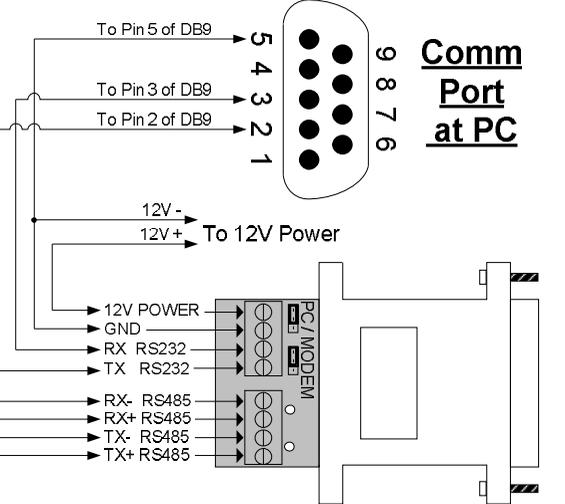

**Comm Port at PC**

**L85 to AD-300 Wired Locksets**